


HIGHLIGHTS:

- Fully Servo motor driven
- Web width up to 520mm
- Single, Double or Semi-turret rewriter
- Optional one or two die cutting units
- Re-register functionality
- Remote maintenance over internet
- 250 job memory
- Jumbo Unwind for 900mm rolls



Cassette type slitting system: shear cutting, razor cutting and crush cutting

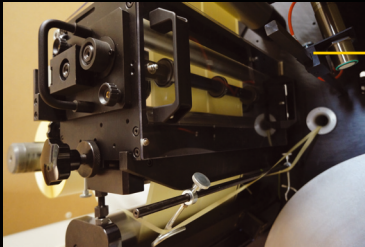


Pneumatic nip roller station and label counter



Servo controlled die cutting station with pressure gauges

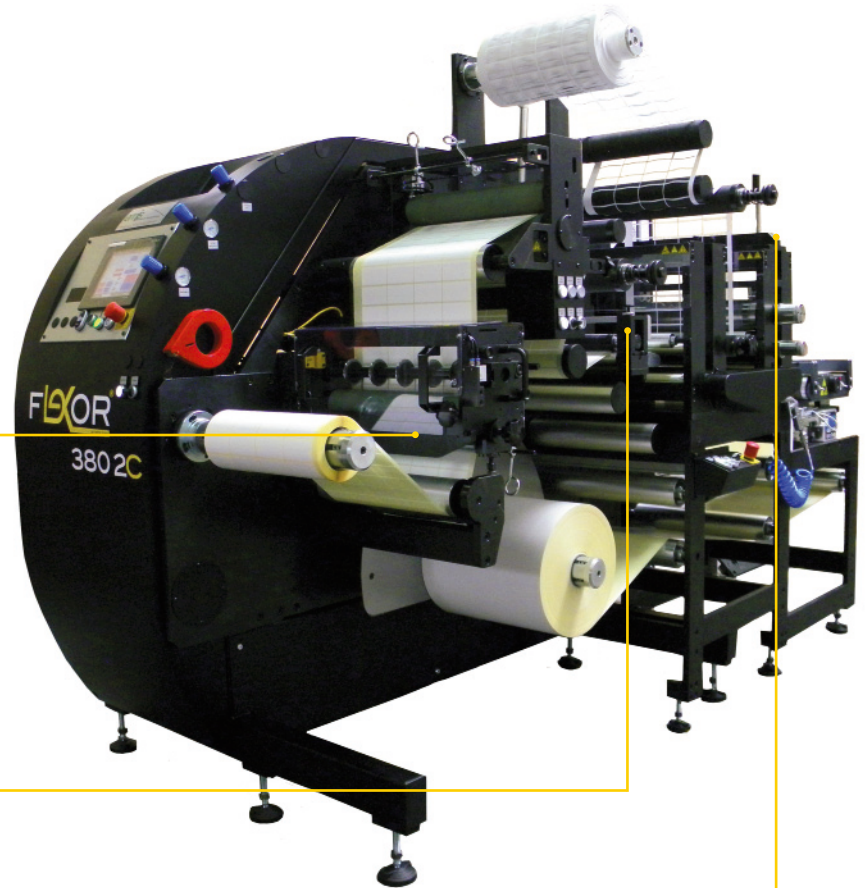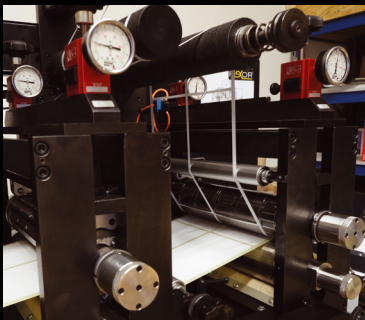

innovations for tomorrow

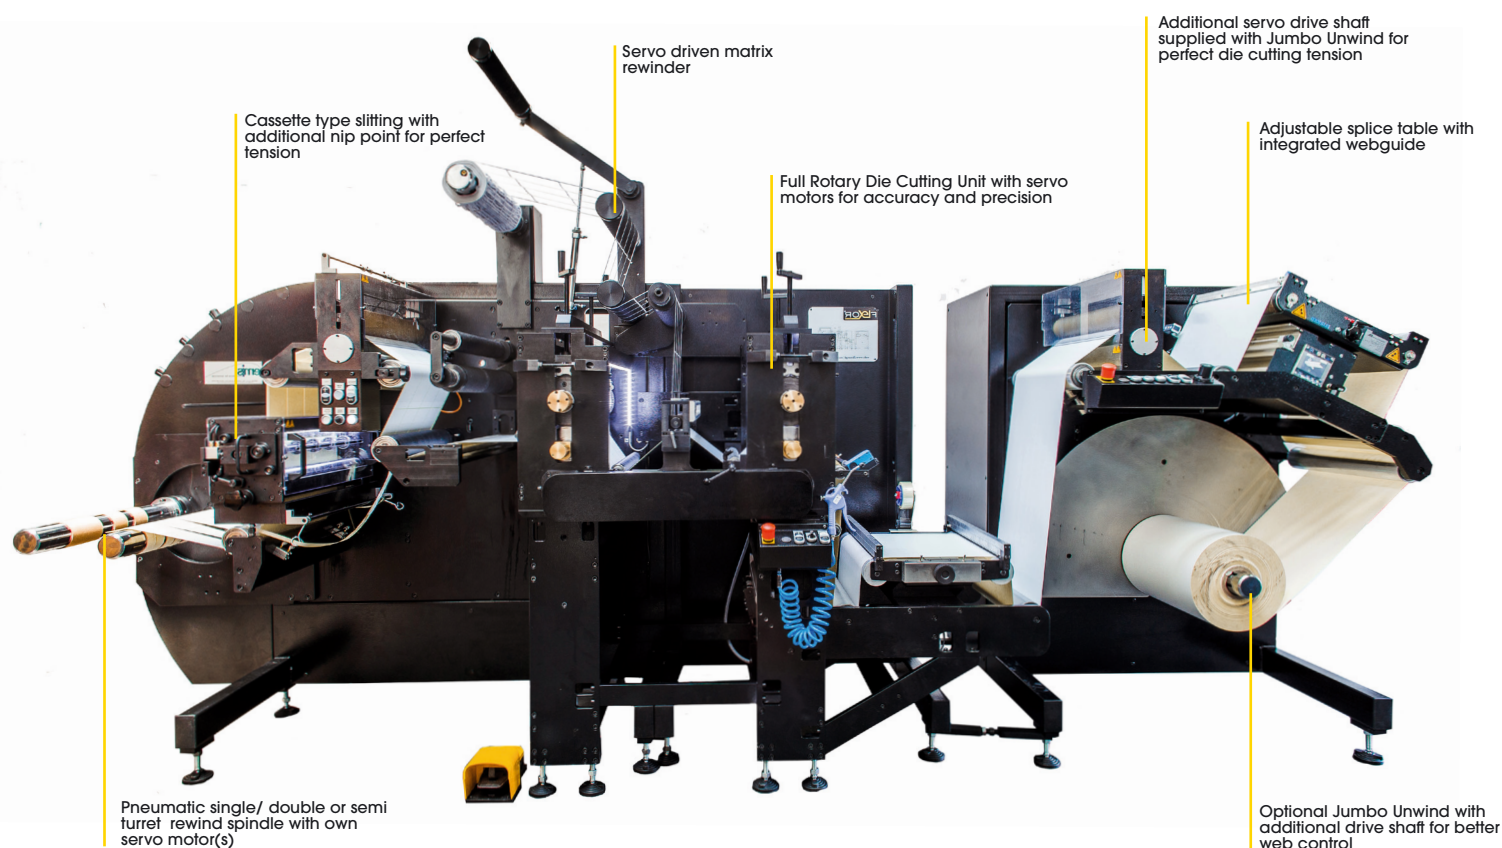

Servo Technology

Latest servo motor technology ensures perfect web tension

Semi / Full Rotary

Semi / Full Rotary die cutting unit with latest linear servo technology for high accuracy and easy setup

Lamination

Optional laminator with unwind and rewind to convert your digitally pre-printed labels

Ergonomic Design

Easy and intuitive design, operator friendly and very straight forward to use with job memory

Servo Rewinders

Our single, double or semi-turret rewinders are fully servo motor driven and ensure that rewind tension is always perfect

Matrix Rewinder

High quality servo driven matrix rewriter ensures that even the most difficult matrix can be rewound easily

Digital Strobe

By using a digital strobe the operators can view the die cutting inline and without any problems for their eyes on a screen

Perfect Slitting

Perfect tension during slitting is key to speed and quality hence every FLEXOR slits between two servo driven Nips

Build in IQ

250 Job Memory, Online Diagnostics, multi lingual support

Ergonomy

Designed with the operator in mind, the machines are user friendly and easy to setup

Flexibility

Highly versatile with many optional extras make the FLEXOR machines your choice no.1

Efficiency

FLEXOR stands for efficiency, high speed, high quality and durability - Test us!

Service Promise

Reliable, quick and formless!

Commitment

We commit to not only be your supplier but your partner for now and the future!

Our customers

From multi-nationals to family owned businesses we are present on all continents!

FLEXOR CT Series	280	380	440	520
Max. web width (mm)	280	380	440	520
Max. unwind dia. (Jumbo) (mm)	750 (900)	750 (900)	750 (900)	900
Max. rewind dia. (mm)	550	550	550	550
Max. machine speed (m/min)	300	300	300	300
Die Cutter: max. /min. cylinder size (inch)	8/20	10/24	12/24	12/26
Die cutting to register: $\pm 0.2\text{mm}$	Yes	Yes	Yes	YES
Dimensions L (with Jumbo) xWxH (m)	2.3 (4.3)x1.4x2	2.3 (4.3)x1.5x2	2.3 (4.3)x1.6x2	2.3 (4.3)x1.7x2

www.flexor.pl
www.youtube.com/flexor4u

EMIS Ltd., Jana Kochanowskiego 45/3, 01-864 Warsaw, Poland
 phone: +48 22 560 30 80 web: www.flexor.pl e-mail: info@flexor.pl

For contact details of all agents and distributors, please visit:
www.flexor.pl