


HIGHLIGHTS:

- Fully Servo motor driven
- Web width up to 520mm
- One or two rewinding units
- Semi Turret Option
- Flag, Splice, Missing Label detection
- Remote maintenance over internet
- Monofilm package

Servo controlled
rewind with
accurate tension
control




Monofilm
rewinding
capabilities

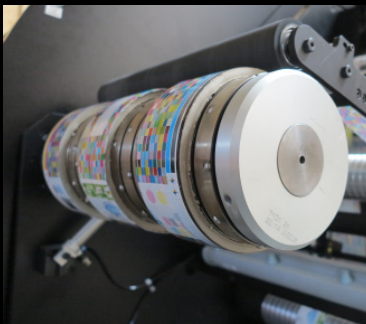

Various
inspection
modes optional:
missing label,
flag and splice,
camera



innovations for tomorrow

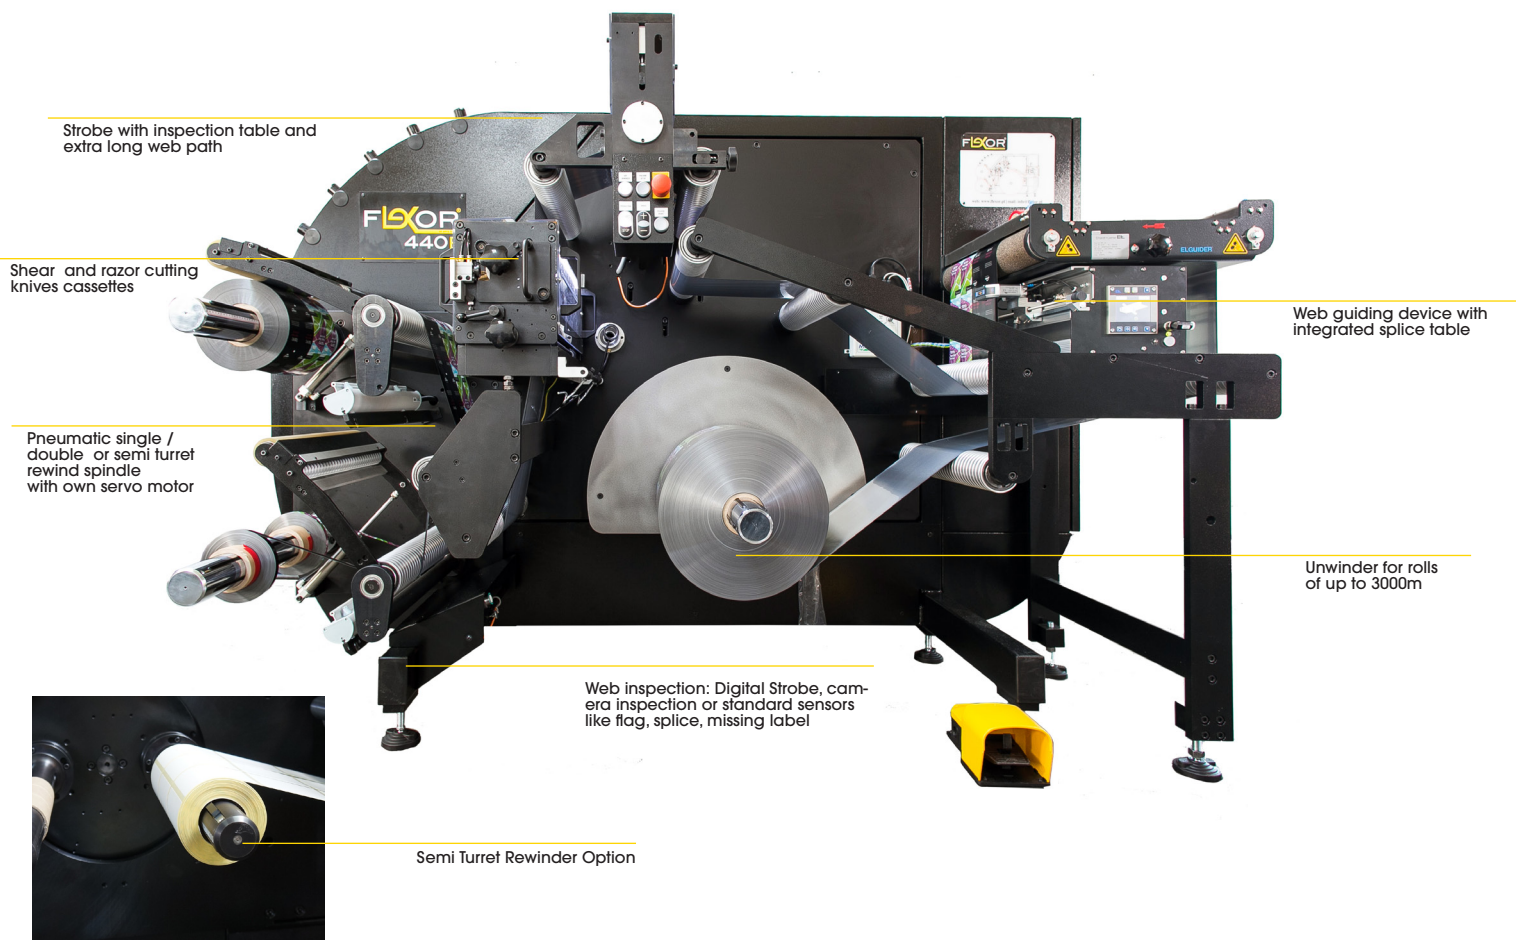

Servo Technology

Latest servo motor technology ensures perfect web tension

Inspection

Standard strobe, digital strobe or camera inspection like the NIKKA M1 or E+L SMARTSCAN - we can offer you all

Jumbo Unwind

Our unwinder can take rolls up to 900mm as standard no option!

Ergonomic Design

Easy and intuitive design, operator friendly and very straight forward to use with job memory

Servo Rewinders

Our single, double or semi-turret rewinders are fully servo motor driven and ensure that rewind tension is always perfect

Monofilm / BOPP

With our monofilm package including lay on rollers, grooved idle roller and anti-static - you can slit film down to 20µm

Web width

Up to 520mm web width is not a problem for us. Simply ask us about our range and we are glad to help you

Perfect Slitting

Perfect tension during slitting is key to speed and quality hence every FLEXOR slits between two servo driven Nips

Build in IQ

250 Job Memory, Online Diagnostics, multi lingual support

Ergonomy

Designed with the operator in mind, the machines are user friendly and easy to setup

Flexibility

Highly versatile with many optional extras make the FLEXOR machines your choice no.1

Efficiency

FLEXOR stands for efficiency, high speed, high quality and durability - Test us!

Service Promise

Reliable, quick and formless!

Commitment

We commit to not only be your supplier but your partner for now and the future!

Our customers

From mult-nationals to family owned businesses we are present on all continents!

FLEXOR BC Series	280	380	440	520
Max. web width (mm)	280	380	440	520
Max. unwind dia. (mm)	900	900	900	900
Max. rewind dia. Single RW (Double) (mm)	550 (350)	550 (350)	550 (350)	550 (350)
Monofilm rewind dia. Double RW (mm)	500 per shaft	500 per shaft	500 per shaft	500 per shaft
Semi Turret Rewind dia. (mm)	350	350	350	350
Max. machine speed (m/min)	300	300	300	300
Dimensions LxWxH (mm)	2100x1300x1500	2100x1400x1500	2100x1500x1500	3500x1600x1500

www.flexor.pl
www.youtube.com/flexor4u

EMIS Ltd., Jana Kochanowskiego 45/3, 01-864 Warsaw, Poland
 phone: +48 22 560 30 80 web: www.flexor.pl e-mail: info@flexor.pl

EMIS Ltd. reserves the right to modify or update all product specifications and functions

For contact details of all agents and distributors, please visit:
www.flexor.pl